

## Swabbing Heads



TIS Swabbing head assemblies are installed on top of the lubricator stack and are used to retain a low pressure fluid seal around braided cable during swabbing operations.

The TIS swabbing head range is available with the following options

- 5,000 Psi, working pressure.
- Standard service.
- Choice of quick union connection.
- Choice of cable size.

### Technical features include

- Ball safety check valve in male quick union connection.
- Compact packing element design reduces operating height.
- Upper and lower bushings are manufactured from Brass material to increase the field life of the cable.

### Swab Head


5,000 psi

Quick Union	Wire Size	Part Number	ReDress Kit
5-1/2"-4x2 'B' Type	3/16" Dia.	0033-00036-TIS	0033-00036-KIT
5-1/2"-4x2 'B' Type	7/32" Dia.	0033-00037-TIS	0033-00037-KIT
5-1/2"-4x2 'B' Type	5/16" Dia."	0033-00038-TIS	0033-00038-KIT
5"-4Thd 'O' Type	3/16" Dia.	0033-00039-TIS	0033-00039-KIT
5"-4Thd 'O' Type	7/32" Dia.	0033-00040-TIS	0033-00040-KIT
5"-4Thd 'O' Type	5/16" Dia.	0033-00041-TIS	0033-00041-KIT

### Swab Head Flow Tube Sets

5,000 psi

Quick Union	Max Wire Size	Part Number	Redress Kit
3/16"	0.184" Dia.	0033-00042-TIS	0033-00042-KIT
3/16"	0.189" Dia.	0033-00043-TIS	0033-00043-KIT
3/16"	0.192" Dia."	0033-00044-TIS	0033-00044-KIT
3/16"	0.197" Dia.	0033-00045-TIS	0033-00045-KIT
7/32"	0.215" Dia.	0033-00046-TIS	0033-00046-KIT
7/32"	0.219" Dia.	0033-00047-TIS	0033-00047-KIT
7/32"	0.223" Dia.	0033-00048-TIS	0033-00048-KIT
7/32"	0.227" Dia.	0033-00049-TIS	0033-00049-KIT
5/16"	0.309" Dia.	0033-00050-TIS	0033-00050-KIT
5/16"	0.314" Dia.	0033-00051-TIS	0033-00051-KIT
5/16"	0.317" Dia.	0033-00052-TIS	0033-00052-KIT
5/16"	0.321" Dia.	0033-00053-TIS	0033-00053-KIT

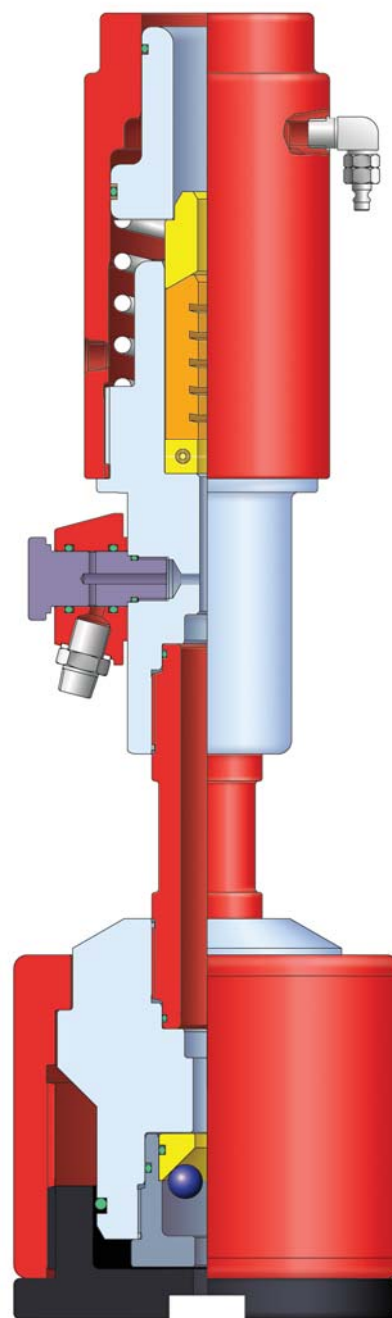

Swabbing Head