

Hydraulic Line Wipers



TIS hydraulic line wiper assemblies are used in conjunction with our standard grease injection control heads. Installed in to the top of the grease head the line wiper is used to remove excess grease from the braided cable when retrieving tools from the well. The packing element is hydraulically energised around the cable removing the grease. A drain port on the side allows the grease to migrate down a hose to a waste bucket.

The TIS line wiper range is available with the following options


- Choice of connection, TIS acme or quick union.
- Choice of cable size.

Technical features include

- Compact packing element design reduces operating height.
- Upper and lower bushings are manufactured from Brass material to increase the field life of the cable.

Hydraulic Line Wipers

Wire Size	Part Number	Redress Kit
3/16" Dia.	0033-00005-TIS	0033-00005-KIT
7/32" Dia.	0033-00008-TIS	0033-00008-KIT
5/16" Dia.	0033-00035-TIS	0033-00035-KIT

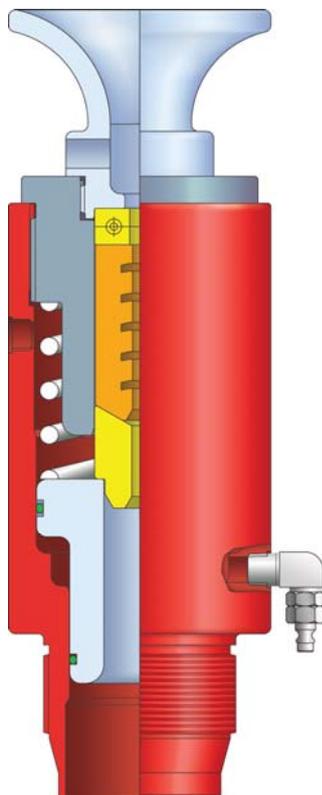

Greasehead with Line Wiper